


**PUBLIC ALLEY
VIEW LOOKING NORTH OR EAST**

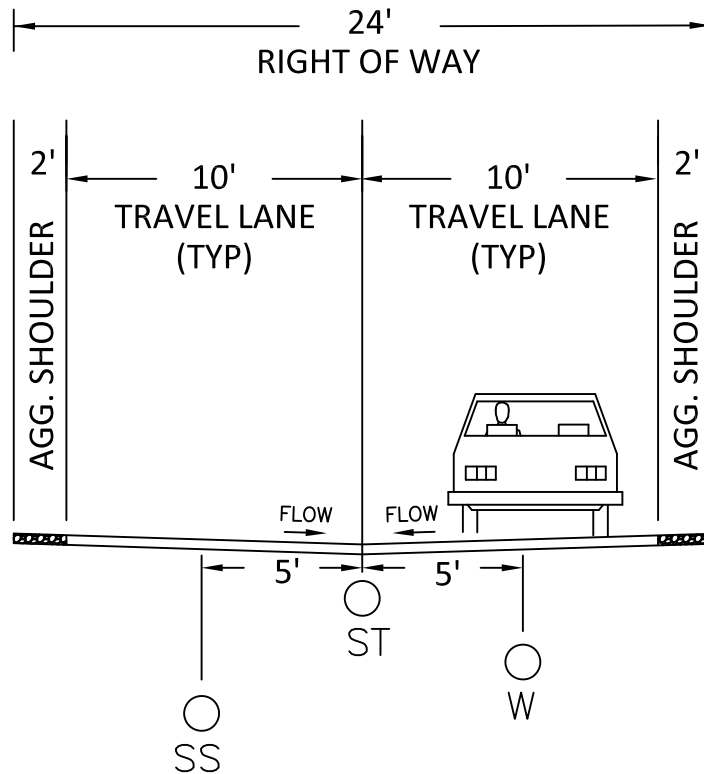

NOTES:

1. WIDTH OF ALLEY DEPENDENT UPON EXISTING RIGHT OF WAY WIDTH. NEW ALLEYS SHALL HAVE A RIGHT OF WAY WIDTH OF 24 FEET.
2. 2-FOOT WIDE, 6-INCH THICK AGGREGATE SHOULDER IS PROVIDED FROM EDGE OF PAVEMENT.
3. ALLEY DRAINAGE SHALL FLOW TO CENTER OF RIGHT OF WAY TO INTERMEDIATE AREA DRAINS AND STORM SYSTEM.
4. NO PARKING FIRE LANE STRIPING AND SIGNAGE AS REQUIRED.
5. ALLEYS ARE FOR VEHICLE ACCESS TO PROPERTIES.
6. ALLEY CROSS SLOPE SHALL NOT EXCEED 2%.
7. ALLEYS SHALL BE CONSTRUCTED OF 6-INCH THICK CLASS 4000 PCC MEETING THE REQUIREMENTS OF ODOT SSC SECTION 00756 PLAIN CONCRETE PAVEMENT.
8. BASE ROCK SHALL BE 4-INCH THICK COMPACTED $\frac{3}{4}$ "-O CRUSHED AGGREGATE WITH A NON-WOVEN SUBGRADE GEOTEXTILE.

Detail Drawing may not be altered or changed in any manner except by the Public Works Director. It is the responsibility of the user to acquire the most current version.

**CITY OF MOLALLA
DEPARTMENT OF PUBLIC WORKS**



PUBLIC ALLEY

DRAWN BY	PW	03/2020
CHECKED BY	GF	03/2020

R-1000