

FIGURE 1
TWO LANE STREET SECTION

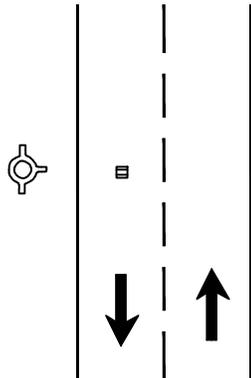


FIGURE 2
TWO LANE STREET SECTION
AT INTERSECTION

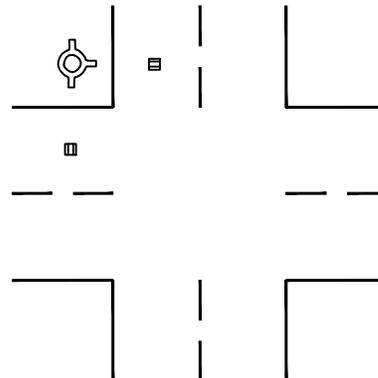


FIGURE 3
THREE LANE STREET SECTION


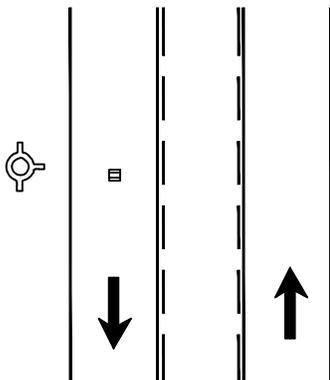


FIGURE 4
THREE LANE STREET SECTION
AT INTERSECTION

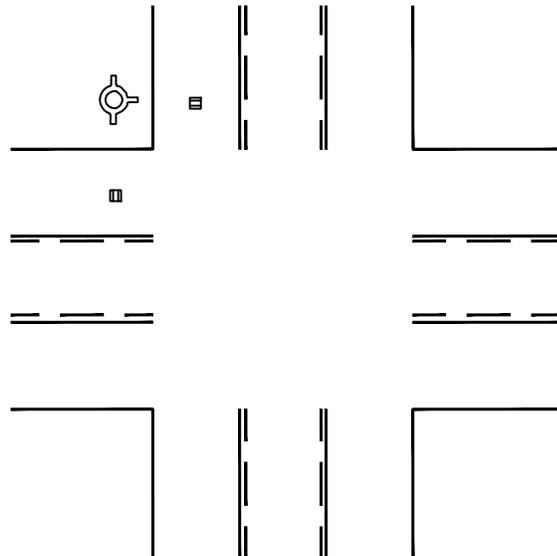

1. IF HYDRANT IS LOCATED WITHIN THE RADIUS OF AN INTERSECTION, PLACE A MARKER ON EACH ROADWAY IN THE LANES CLOSEST TO THE HYDRANT.
2. MARKER IS PLACED PERPENDICULAR (90 DEGREES) TO THE HYDRANT.
3. CONTRACTOR SHALL SUPPLY AND INSTALL ALL BLUE REFLECTORS AND MELT DOWN THERMOPLASTIC PADS.

Detail Drawing may not be altered or changed in any manner except by the Public Works Director. It is the responsibility of the user to acquire the most current version.

CITY OF MOLALLA
DEPARTMENT OF PUBLIC WORKS



FIRE HYDRANT MARKER LOCATIONS

DRAWN BY AP 02/2019

CHECKED BY GF 02/2019

W-3042